

# PITCHED CURB 15×22 30×100




## DANE TECHNICZNE

Palett weight (kg)	1400*
Number of pieces per pallet	16

## WZORNIK

### STANDARD SURFACE




STANDARD  
SURFACE

grey



Zobacz ten produkt  
online w swoim  
smartfonie

A pitched curb – 15×22-30×100 cm – is used for **smooth crossing between the road and the overrun curb**. Most frequently used at the entrances passing perpendicularly through the sidewalk.

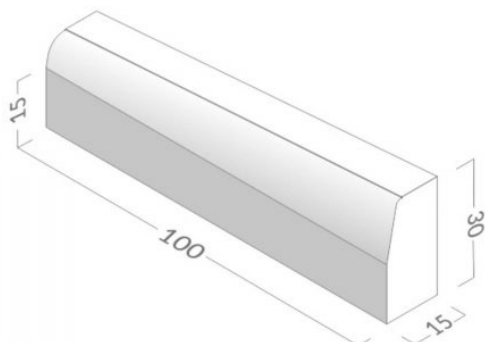

## APPLICATION

Lowering curbs in the execution of car entries and pedestrian crossings.

## USEFUL RECOMMENDATIONS

Installation in accordance with the construction practice, do not lay lying down. The width of joints 5-10 mm, laying on concrete benches.

## SPECIAL FEATURES

Rectangular curb beveled on one side, with rounded edges. The curb has a variable height on the one side adapted to the overrun curb and on the other to the road curb. Spacers on one side. ATTENTION: For technological reasons pallet's weight may change.

